
Berkey Stainless Steel™ Spigot

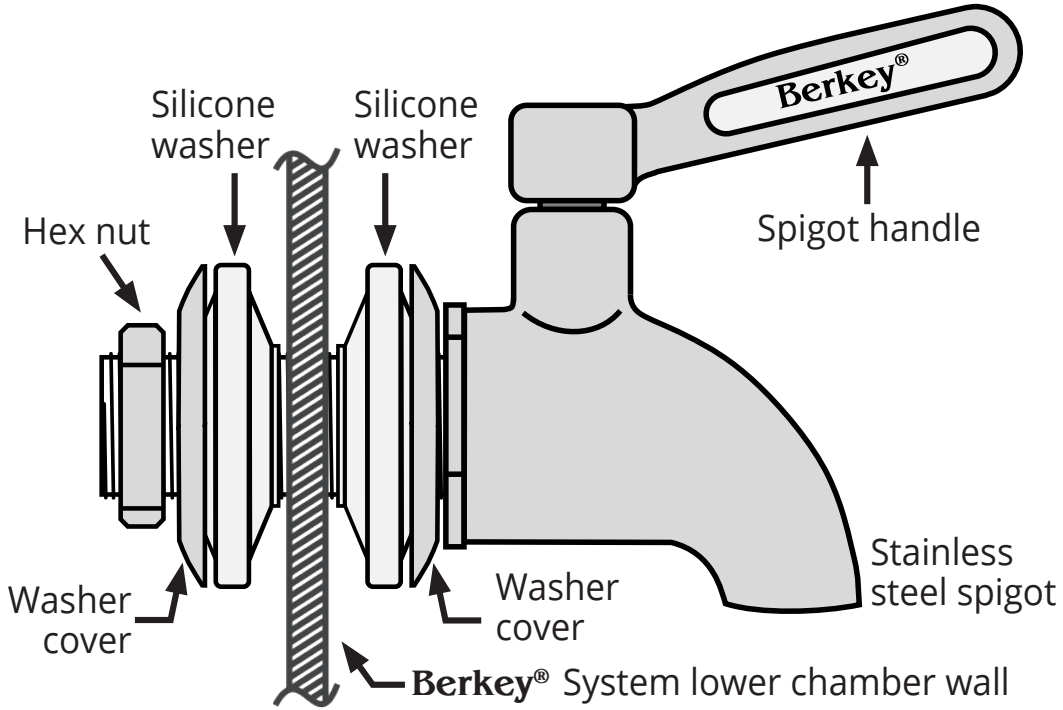

Assembly Instructions

Applies to all Berkey® Stainless Steel Systems

Please wash all parts in warm soapy water and rinse thoroughly before use.

Remove white plastic covers from the two stainless steel washer covers. Place one washer cover over threads with the beveled side facing spigot handle.

Then, place one silicone washer onto spigot's threads. Insert threaded stem of spigot through the hole in the side of the lower chamber. Insert second silicone washer over the treads, followed by the second washer cover. Secure spigot in place with spigot nut. Tighten securely by hand only.

Hint: For the last approximate one-quarter to one-half turn, hold nut in place and gently turn the spigot until it is tight. Then, rotate both spigot and nut until the spigot handle is facing upwards. Close spigot handle before use.

Berkey®
WATER SYSTEMS

 © Copyright 2002-2023 - New Millennium Concepts, Ltd. All Rights Reserved.